
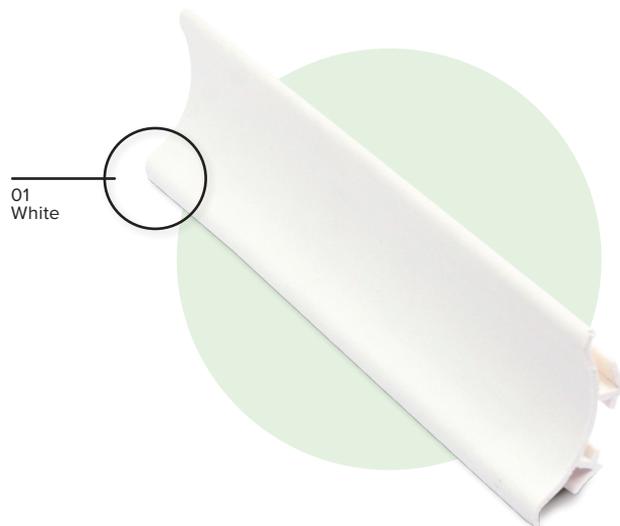


# SRP

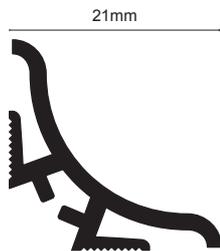

## Product Description

Attractive yet robust: The rigid but curved design makes it robust enough to finish any installation requiring an internal bead whilst having an attractive appearance. The product can be used on the horizontal or vertical place, around a work surface, or as a skirting on a floor or a coving around a ceiling. Mitre pieces and end caps are available for the SRP to provide the perfect finish to the installation.

## Maintenance

Genesis SRP requires no special maintenance - they should be cleaned periodically using a neutral detergent to maintain the appearance.

Regular cleaning aids the longevity of the profile and ensures there is no corrosion that could affect safety.

## Dimensions

Profiles are available in 2.5m lengths.

## Installation

1. Cut to length allowing mitres for corners.
2. Ensure the surfaces that the beading is being applied to are completely clean and free from dust.
3. Use an approximate bead of 5mm of silicone or acrylic on the back of the profile at or around both of the supporting legs. If the product is used around a bath, use silicone to allow for slight movement.

## Technical Details

UPVC is particularly suitable for a wide range of application due to its excellent chemical resistance, however note the following:

Not recommended for use above 60°C resistant to most oils, alcohols, petrol and fats. It is unsuitable for use in contact with aromatic and chlorinated hydrocarbons, ketones, nitro compounds, esters and cyclic ethers with cause some swelling.

## Allied Products

- SRE 2 way external corner
  - SRI 2 way internal corner
  - SRT 3 way internal corner
- All supplied with 5 pieces per pack

Property	Test Method	Result
Vicat Softening Point	ISO 306 PN-EN ISO 306: 2014-02	79.8±20°C
Shore hardness	PN-EN ISO 868: 2005	70±5 ShD
Charpy impact strength	PN-EN ISO 179-1/eC:2010	1.7 C* kJ/m <sup>2</sup> <small>*the test is made from the raw material, not from the final product</small>
Maximum stress, durability	PN-EN ISO 527-1:2012, PN-EN ISO 527-2:2012	35.4 MPa
Colour variation	L*a*b	Conform with defined colour referential (ΔE≤4)

