




PROBAND BU

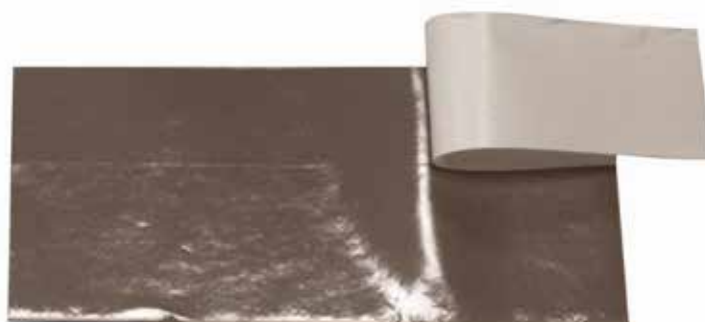

DESCRIPTION

PROBAND BU is a butyl adhesive tape, with high-adhesion, covered on one side with an alkali-resistant polypropylene non-woven sheet. On the other side it is provided with a silicone film that must be removed before laying. **PROBAND BU** allows the application of **PROBAND 150 / 250** along the wall - floor connection in case of bituminous coverings, PVC, wood, polycarbonate, glass, plastic, metal and any support that is not compatible with cementitious adhesives.

WARNINGS

Store the product in dry environment avoiding direct sunlight and heat sources at a temperature between + 5 °C and + 40 °C and use it within 12 months. Keep out of the reach of children. Check, before laying, that **PROBAND BU** has a good adhesion to the support; if the adhesion is not good, clean properly the support surface. For information not explained in the technical details, please contact our technical department.

PRODUCT PLUS

- Suitable for non-absorbent support
- High elasticity
- Easy to lay

LAYING INSTRUCTIONS

1. Cut **PROBAND BU** to the desired length and remove the silicone film.



3. Beat **PROBAND BU** with a rubber hammer in order to ensure its adhesion to the support.

4. Apply the hydrophobic adhesive **PROBAND KOLL** on floor and wall to a width of about 10 cm, taking care to fill the cavities of the membrane.

AREAS OF USE

Use

Balconies, terraces and outdoor surfaces of any size.

PROBAND BU allows the application of **PROBAND 150 / 250** with **PRODESO**, **PRODESO HEAT - GRIP** in case of bituminous coverings, PVC, wood, polycarbonate, glass, plastic, metal and any support that is not compatible with cementitious adhesives.

Don't use it

On dirty, incoherent and wet supports.



2. Lay **PROBAND BU** on the bituminous covering, PVC, wooden, polycarbonate, glass, plastic or metal.





PROBAND BU



5. Place **PROBAND 150 / 250** on the adhesive following the wall/floor connection.

6. Press and smooth **PROBAND 150 / 250** in order to ensure sealing, avoiding the formation of folds.



TEXT TEMPLATE FOR TENDERS

Supply and installation of butyl adhesive tape, covered on one side with an alkali-resistant polypropylene no-woven sheet. On the other side it is provided with a removable silicon film, like PROBAND BU of the Progress Profiles company.

PRBBU 7515 : Butyl adhesive tape, covered on one side with an alkali-resistant polypropylene no-woven sheet.

Length : _____ ml
Material : _____ €/ml
Application : _____ €/ml
Total value : _____ €/ml

TECHNICAL DATA

Appearance	Butyl adhesive tape butyl covered on one side with an alkali-resistant polypropylene no-woven sheet.	
Color	Grey/white	
Shelf life	12 months in a dry in dry environment avoiding direct sunlight and heat sources	
Total thickness	≈ 1 mm	
Width	≈ 7,5 cm	
Roll length	≈ 15 m	
Specific weight	1,45 – 1,55 g / cm ³	

PERFORMANCE HIGT – TECH

Longitudinal breaking load	100 N	EN 12311-1
Transversal breaking load	100 N	EN 12311-1
Longitudinal ultimate elongation	≈ 70 %	EN 12311-1
Transversal ultimate elongation	≈ 70 %	EN 12311-1
Temperature range for application	0° C / + 45 °C	
Working temperature	- 40° C / + 100° C	