



* Each base is shaped to allow them to be stacked if desired


Base

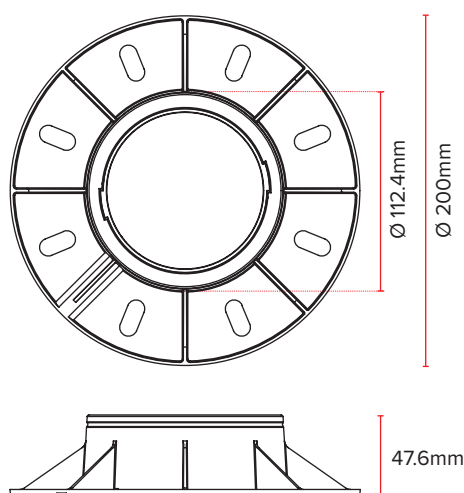

Lock

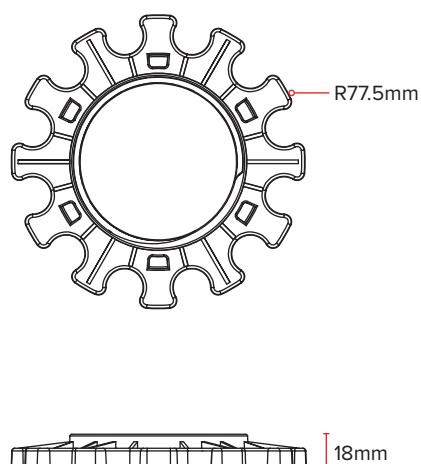

Head

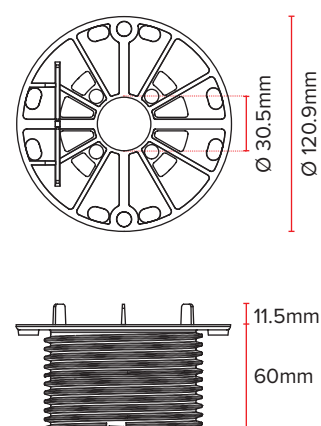

Code	Description	Load Capacity	Dimension	Weight	Pkg. / Pallet
GP60115	60-115mm Pedestal - 4mm joint	1000kg	60-115mm	0.24kg	30 pcs / 450 pcs

Product Description

GP60115 has an adjustable height starting from 60mm to a maximum of 115mm.

Base laying surface: 314cm².

Head diameter: 120mm with a laying surface of 113cm².

The base allows the correct water drainage.

Use

Used in external areas, terraces, pavements.

The use of polishing and sanding machines is not recommended.

Fields of Use

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

Load Test


Test 1

Code	Height	Max. Load (N)
GP60115	1,120mm	9.033

The test was made using a 150mm diameter punch

Max. Load: 9.033 N

Bend at Max. Load: 21mm

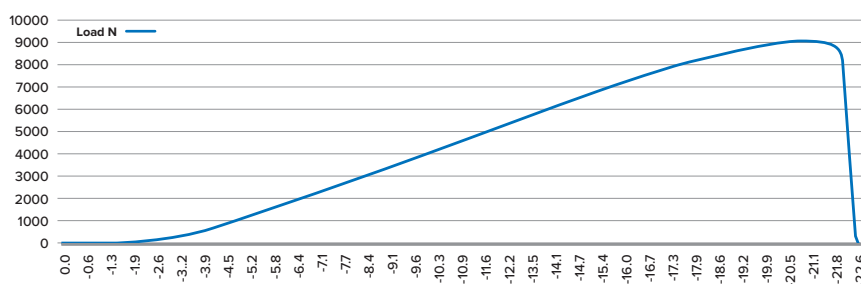


Test 2

Code	Height	Max. Load (N)
GP60115	1,100mm	10.46

The test was made using a 150mm diameter punch

Max. Load: 10.467 N

Bend at Max. Load: 20.7mm

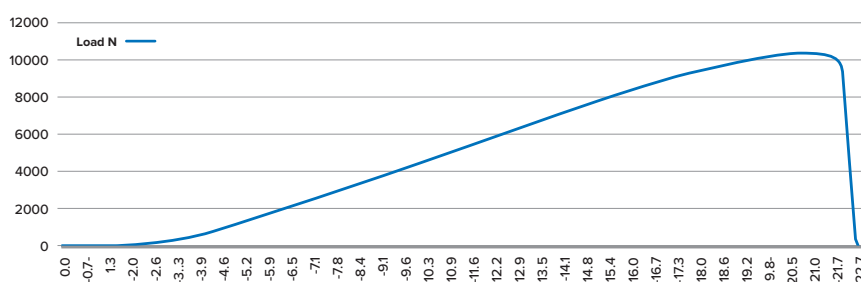

Specifications

Material: Polypropylene - Fully Recyclable

Fire Rating: HB (UL94)

Sound Absorption: N/A

Application Temp.: -40°C to +80°C

Density: 1.18g/cm³

Hardness (Shore A): 75 Shore D (rigid material)

Tensile Strength: Approx. 18 MPa (raw material)

