



\* Each base is shaped to allow them to be stacked if desired




## Base

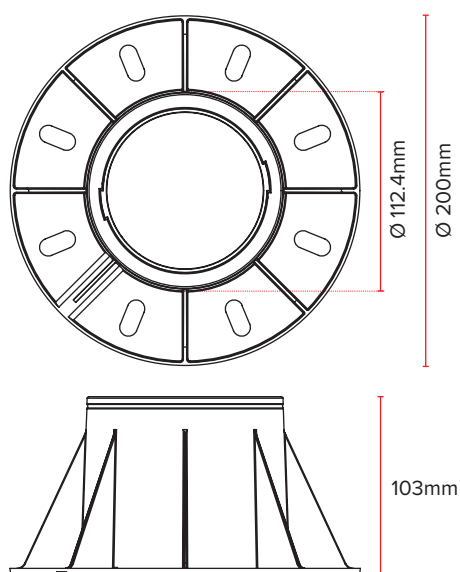

## Lock

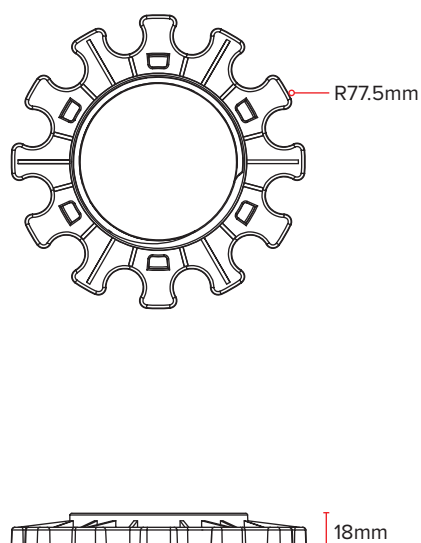

## Head

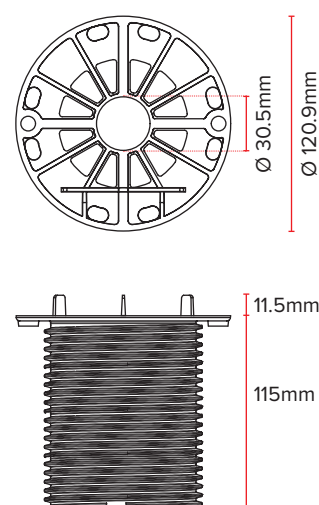

Code	Description	Load Capacity	Dimension	Weight	Pkg. / Pallet
GP115220	115-220mm Pedestal - 4mm joint	1000kg	115-220mm	0.358kg	15 pcs / 225 pcs



+44 (0)1642 713000 info@genesis-gs.com www.genesis-gs.com



## Product Description

GP115220 has an adjustable height starting from 115mm to a maximum of 220mm.

Base laying surface: 314cm<sup>2</sup>.

Head diameter: 120mm with a laying surface of 113cm<sup>2</sup>.

The base allows the correct water drainage.

## Use

Used in external areas, terraces, pavements.

The use of polishing and sanding machines is not recommended.

## Fields of Use

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

## Load Test


### Test 1

Code	Height	Max. Load (N)
GP115220	1,120mm	9.033

The test was made using a 150mm diameter punch

**Max. Load: 9.033 N**

**Bend at Max. Load: 21mm**

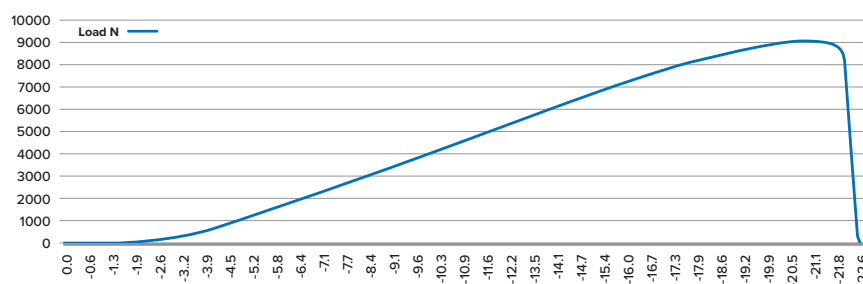


### Test 2

Code	Height	Max. Load (N)
GP115220	1,100mm	10.46

The test was made using a 150mm diameter punch

**Max. Load: 10.467 N**

**Bend at Max. Load: 20.7mm**

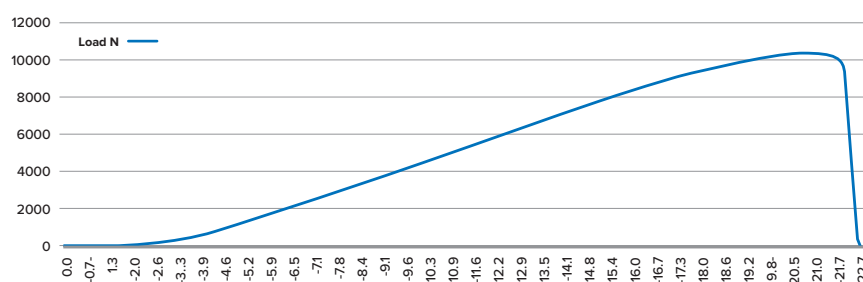

## Specifications

Material: Polypropylene - Fully Recyclable

Fire Rating: HB (UL94)

Sound Absorption: N/A

Application Temp.: -40°C to +80°C

Density: 1.18g/cm<sup>3</sup>

Hardness (Shore A): 75 Shore D (rigid material)

Tensile Strength: Approx. 18 MPa (raw material)

