
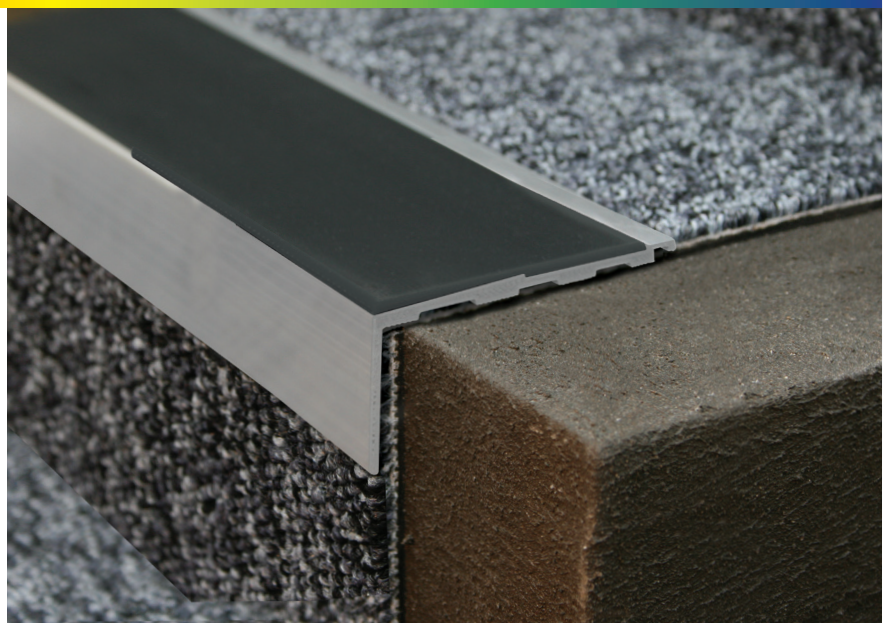


NXF/S


Product Datasheet 6.19

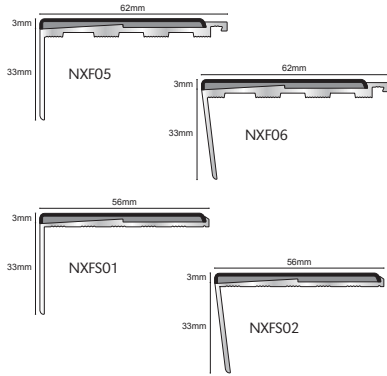

Frontier

Channel NXF

80 Mill
Alu



Channel NXFS

80 Mill
Alu



Product Description

The X-Range offers a unique mechanism to secure the insert in position while offering heightened exposure to the leading edge.

This increased foot contact to the slip-resistant insert reduces the risk of slips, trips and falls on stairs designed to meet the guidance in Approved Document M and BS8300-2:2018.

Dimensions

Stock Lengths of 2.77m.

Technical Details

Not recommended for use above 60°C, resistant to most oils, alcohols, petrol's and fats. It is unsuitable for use in contact with aromatic and chlorinated hydrocarbons, ketones, nitro-compounds, esters and cyclic esters will cause some swelling.

Maintenance

Inserts: All inserts should be cleaned using a neutral detergent and thoroughly rinsed with clean water. Ensure all inserts are dry prior to receiving foot traffic.

Installation

1. Ensure the steps are dry, clean, free of debris, level and even.
2. If pre-drilled use the drill holes to mark steps for drilling location.
3. Drill and Plug the steps.
4. Apply suitable adhesive to the underside of the nosing and apply nosing to the step.
5. Screw down the step with the appropriate size screws.
6. Apply insert (if separate) or insert pip to cover the screw head.

Insert	LRV	NXF	N XFS
Standard			
16 Black	4.5		
44 Ice Grey	42.1		
47 Yellow	55.7		
Anodising			
16 Black	4.7		
81 Matt Silver	73.6		
86 Bright Brass	64.3		
91 Bright Silver	49.79		

NXF/S Rigid & Flexible



+44 (0)1642 713000 info@genesis-gs.com
www.genesis-gs.com



Genesis
For the Perfect Finish